


NOVEL Midtown Tampa, Tampa, FL, Vignette | Interior Design  
Carved Wood Panels – WPVEP158




**WPVEP158**  
SQUARES – WHITE OAK

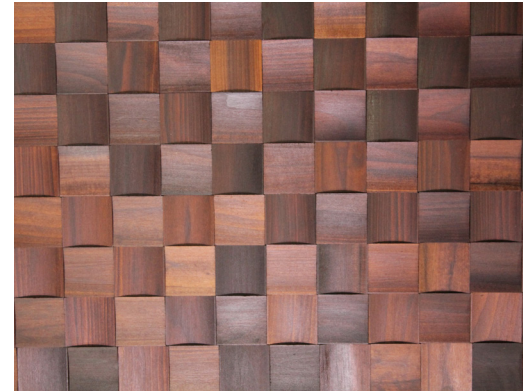

**WPVEP160**  
SQUARES – POPLAR



**WPVEP161**  
GRIDLOCK – WHITE OAK

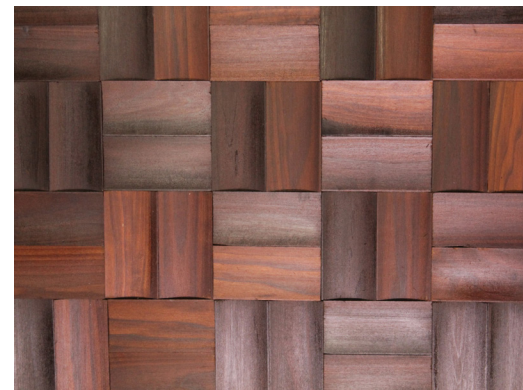

**WPVEP163**  
GRIDLOCK – POPLAR

## CARVED WOOD PANELS


**Carved Wood Panels**, available exclusively from ASI is a collection comprised with a White Oak or Poplar timber and two textured pattern options: **Squares** and **Gridlock**. These dimensional panels are easy to install with a durable birch backing allowing for an impactful focal wall statement with an artisan vibe.

## SPECIFICATIONS

<b>PANEL SIZE</b>	<b>SQUARES:</b> 16" x 60" <b>GRIDLOCK:</b> 16" x 56"
<b>SEGMENT SIZE</b>	<b>SQUARES:</b> 2" x 2" <b>GRIDLOCK:</b> 4" x 4"
<b>THICKNESS</b>	9mm and 14mm including backing
<b>BACKING</b>	6mm Birch
<b>SPECIES</b>	White Oak and Poplar
<b>FINISH</b>	100% Natural Oil
<b>INSTALLATION</b>	Interlocking, Glue and Finishing Nails
<b>ASI® ADVANTAGE</b>	No VOC emissions

\*Please note that variations in color and texture may occur due to the nature of the material




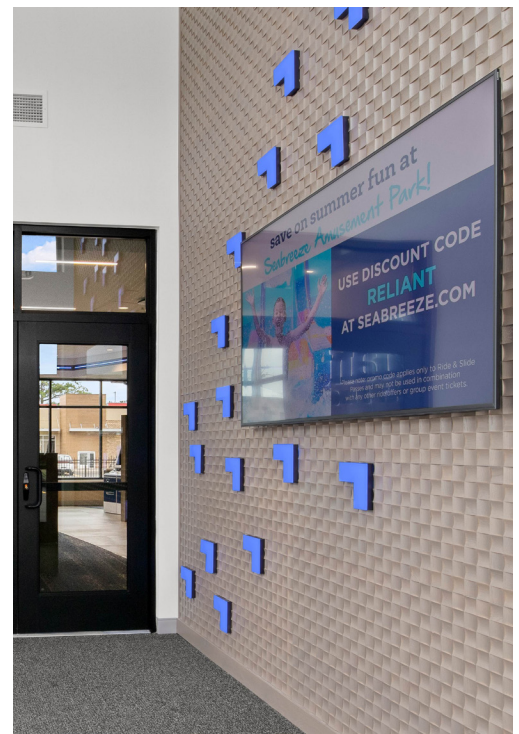

**Reliant Credit Union**  
Farmington, NY, La Macchia Group  
Carved Wood Panels -- WPVEP158



**Tichner Residence**  
South Florida  
Carved Wood Panels -- WPVEP158; Poplar -- WPVEP160

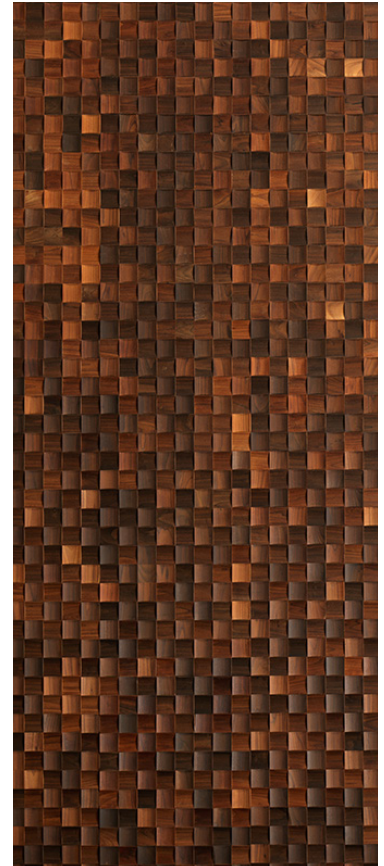

ASI | Architectural Systems, Inc. guarantees the conformity of its products when they are installed according to the installation instructions and are maintained in an environment where ambient humidity ranges between 35% and 55%: before, during and after installation. **LEAVE THE BOX IN THE ROOM WHERE IT IS TO BE INSTALLED FLAT ON THE FLOOR IN ITS ORIGINAL PACKAGING UNTIL INSTALLATION.**

**PRECAUTIONS:** Always wear work gloves and safety glasses when installing the product.

## TOOLS:


- Vertical adhesive through ASI
  - Spec ID# FLDT025
- Caulking gun
- Miter saw
- Tablesaw
- Level
- Measuring tape
- Cutter
- Pneumatic finish hammer (#23 gauge finish nails)
- Stepladder

**MAKE SURE YOUR KNIVES AND SAW-BLADES ARE IN PRIME CONDITION.**

**First,** check the wall(s) is level from floor to ceiling and edge-to-edge. If not, adjust accordingly.


## STEP 1:

**A.** On the back of panel, apply a line of vertical adhesive through ASI, **Spec ID# FLDT025** in the shape of a rectangle (1/2" (1.3 cm) from edges) and an X inside the rectangle. See diagram below.

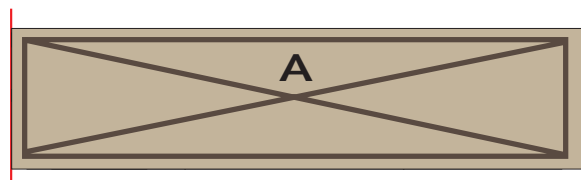

## STEP 2:

First, make sure that the plywood lips face up and to the right. Position the first panel horizontally at lower left wall. Make sure each wall panel and each row is level.

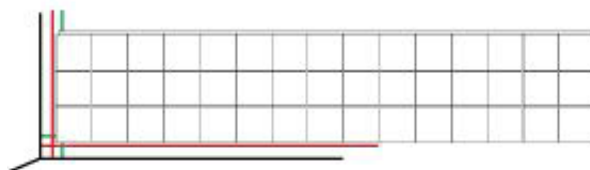

## STEP 3:

Nail panel in place with #23 gauge nails in backing around the panel. **NEVER NAIL DIRECTLY ON FACE OF WALL PANEL.**

## STEP 4: INSTALLATION OF SUBSEQUENT PANELS

Repeat gluing step. Align panel B against panel A. Repeat nailing step.



**NOTE:** If wood pieces detaches from a wall panel, reposition using vertical adhesive through ASI, Spec ID# FLDT025.

The wall panel needs to be glued and nailed for a successful install and to prevent future warping. Failure to comply with the installation instructions shall void the application of the warranty. This is a glue and nail installation. Do not install over material other than drywall and plywood.



## STEP 5: END A ROW

Before installing last panel in row, measure from the top row of the panel already installed to where installation is to be completed. The remaining section of panel will serve as first panel in next row.

## STEP 7: LAST ROW

Cut panels of last row lengthwise to fit available space..

## STEP 6: START A NEW ROW

Use remaining piece from previous row if available. Repeat steps 1, 2 and 3.

# MAINTENANCE

**Clean-up recommendations:** a regular dusting with a soft cloth or a feather duster.

**NOTE:** If wood pieces detaches from a wall panel, reposition using vertical adhesive through ASI, Spec ID# FLDTC025.

The wall panel needs to be glued and nailed for a successful install and to prevent future warping. Failure to comply with the installation instructions shall void the application of the warranty. This is a glue and nail installation. Do not install over material other than drywall and plywood.

## PLEASE READ BEFORE THE INSTALLATION

Environmental conditions such as exposure to light and fluctuation in temperature and humidity, will greatly affect product performance from the initial installation throughout its life. Refer to our installation instructions and warranty for proper steps to a successful install and ensure the lifelong performance of your Architectural Systems, Inc. wall. Failure to follow the installation instructions shall void this warranty.

Architectural Systems, Inc. guarantees the conformity of its products when they are installed according to the installation instructions and are maintained in an environment where ambient humidity ranges from 35% to 55% before, during and after the installation.

Solid wood and wood veneer are susceptible to show movement when ambient humidity level is below 35% or above 55% such as gapping between pieces and possible cupping.

Architectural Systems, Inc. can not be held responsible for site conditions and products that are not installed per our instructions.

Architectural Systems, Inc. guarantees the wall panels against manufacturing defects. If, upon opening a box a panel is defective or fails to meet quality standard, the consumer may return the panel to the original dealer for a replacement.

This product is flammable and its use near an important heating source is not recommended. Please check the latest construction regulations in your area. In addition, the wood will lose its humidity which can cause delamination.


**Storage:** Do not store in a garage, basement, or other locations where the wood would be exposed to the effects of uncontrolled humidity and environment conditions.

## 5 - Year Limited Structural Warranty

Architectural Systems, Inc. guarantees the wall panel, in their original condition, shall be free from manufacturing defects for the period of 5 years from the date of the original purchase.

## 3 - Year Finish Limited Warranty

Architectural Systems, Inc. guarantees the surface finish on the wall panel under normal conditions won't wear through for the period of 3 years from the date of the original purchase.



Given the nature of wood, it is possible that the wall panels may vary in colour variations from one panel to the next, from one sample to the next, and from one production lot to the next. We recommend that you lay out the panels on the wall based on your personal colour preferences. Such variations may not be claimed under warranty.

To avoid dramatic variation between pieces, it is recommended that the installation be completed from the same lot.

Ceiling applications are not covered by this warranty.

This warranty does not cover ANY other costs, such as, but not limited to, installation, transport, punitive damages, labor etc.

This warranty does not cover cupping and/or delaminating due to excessive moisture or humidity.

This warranty does not cover damages caused by or related to improper storage or installation of the wall panels.

This warranty does not cover manufacturing defects in the wall panels which have been installed, and which could have been discovered by the installer prior the installation.

**By installing this product, you confirm that you have consulted the installation instructions and acknowledge your approval of the product and its warranty.**

### **What Architectural Systems, Inc. Will Do**

Architectural Systems, Inc. will repair or replace any defective wall panels or issue credit for the defective portion. However, you are responsible for the costs associated with shipping and handling of replacements, as well as any additional expenses related to the defective panels, including labor for removal and installation, and any extra materials required. Please note that, due to the natural variations in the product, replacements may not match the original order in terms of color, tone, or other inherent wood characteristics.

Should you have any questions or concerns regarding the product, installation, or warranty, please reach out to your sales representative.